


# Kay Thin Twin (K161V) Wiring Diagram

1. PICKUP LEADS- HOT WIRE GOES TO THE OUTER COIL LEAD  
GROUND (SHIELD) GOES TO INNER COIL LEAD AND SCREW ON PICKUP MOUNT.
2. SWITCH + POT CASES ALL COMMON CONNECTION THROUGH LEAD WIRE SHIELDS AND JUMPER LEADS.
3. THIS MODEL HAS CTS 500KA POTS AND IMPORT 3-WAY SWITCH.
4. NECK PICKUP = 9.2K  
BRIDGE PICKUP = 11.3K  
MAGNETS BOTH NORTH ↑ UP  
GAUSS - OFF THE METER 75+



NOTE: JAZZ II WIRING IS THE SAME WITH THE EXCEPTION OF THE 3-WAY SWITCH TYPE.

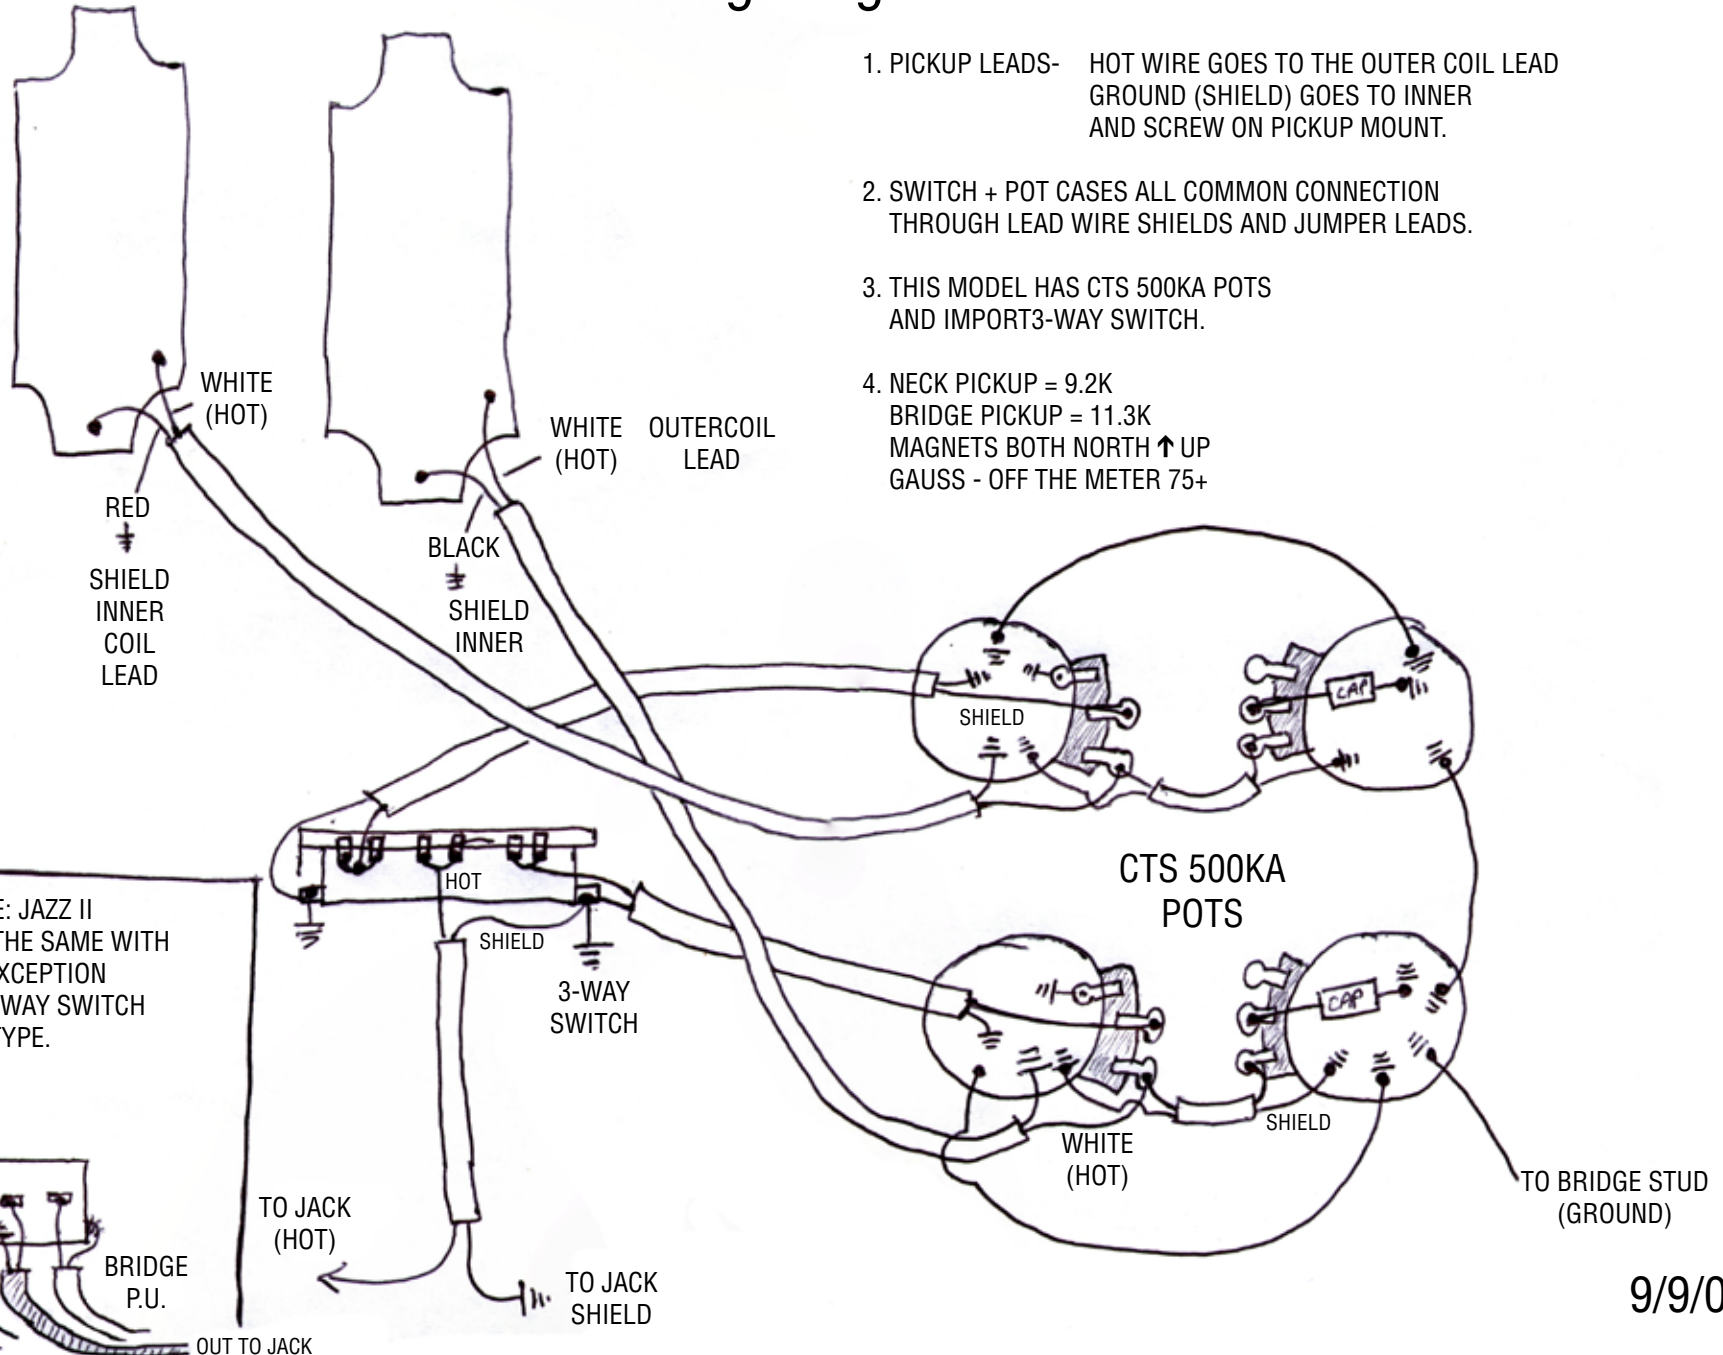